


# T100 PRO SERIES MEDIUM PRESSURE

Maximum Flow Rate: 170 l/min (45 US gpm) 1543 BPD  
Maximum Pressure: 241 bar (3500 psi)

 **WANNER™** HYDRA-CELL® PRO  
SEAL-LESS PUMP TECHNOLOGIES

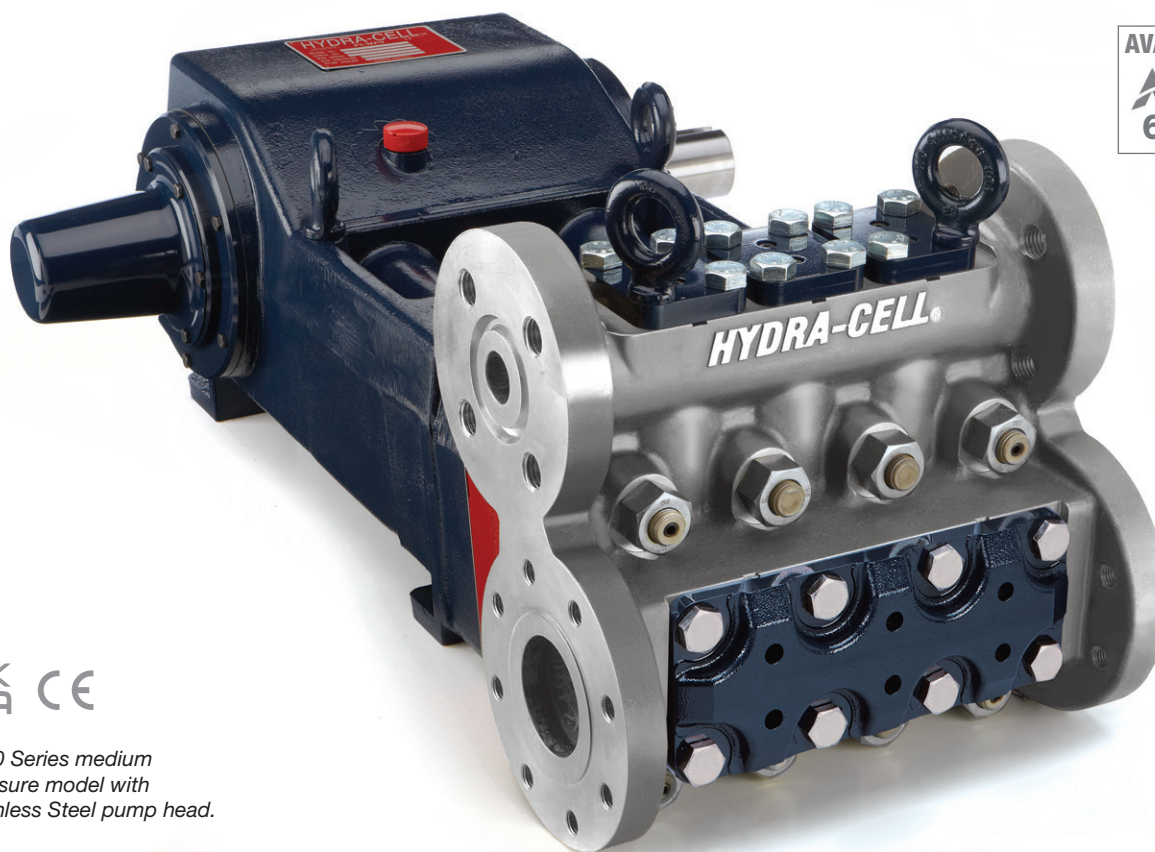

UK  
CA CE

*T100 Series medium  
pressure model with  
Stainless Steel pump head.*

## A higher standard of pump performance and energy efficiency.




- Integrates **Wanner Hydra-Cell® Pro** seal-less pump technologies for the highest levels of volumetric and energy efficiencies across a full rpm range.
- Patented ADPC (Advanced Diaphragm Position Control) and hydraulic oil management systems protect diaphragms under closed or restricted inlet conditions.
- Can run dry indefinitely without damage to the pump, eliminating downtime and repair costs.
- Pumped liquid is 100% contained, eliminating environmental risks, ground contamination and volatile emissions.
- Seal-less design eliminates leaks, hazards and costs associated with seals and plunger packing.
- Exceeds API 675 standards for accuracy, linearity and repeatability.
- Wider range and higher inlet pressures to 34 barg.
- Self-priming – eliminates need for charge pumps.
- Unique diaphragm design reliably handles a wide range of viscosities and shear sensitivities, corrosive liquids, abrasives, slurries and suspended solids.
- Lower total cost of ownership in acquisition, operation, service, maintenance, and energy use.

# T100 Pro Medium Pressure | Performance

## Capacities

Model	Max. Input rpm	Plunger Dia.		Max. Flow Capacities			Max. Pressure Ratings			
							Discharge		Inlet	
		inches	mm	US gpm	l/min	BPD	bar	psi	bar	psi
T100K	450	1.750	44	45	170	1543	207	3000	34	500
T100M	450	1.625	41	38	144	1302	241	3500	34	500

Consult factory when operating below 45 rpm

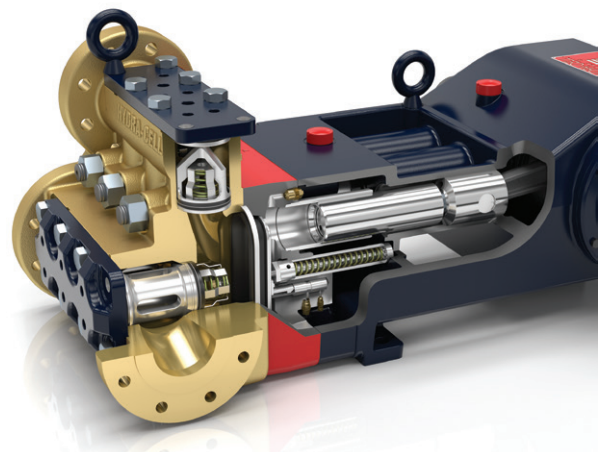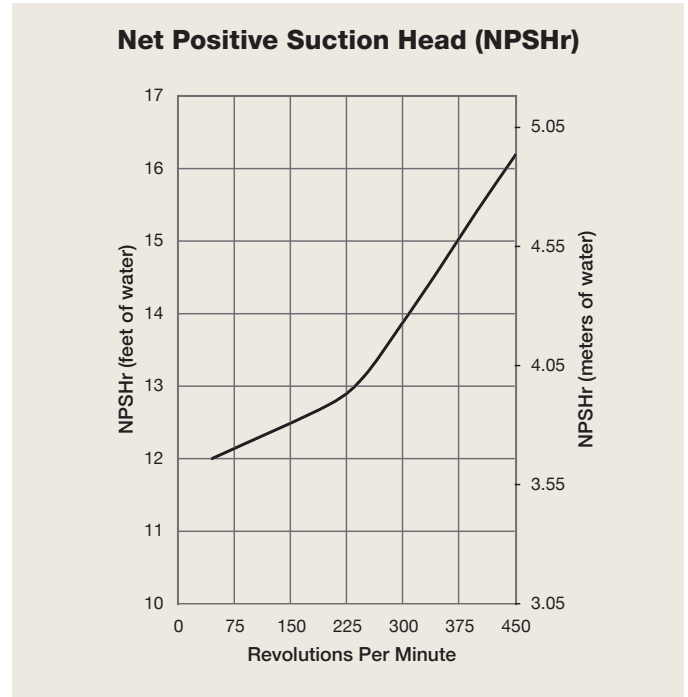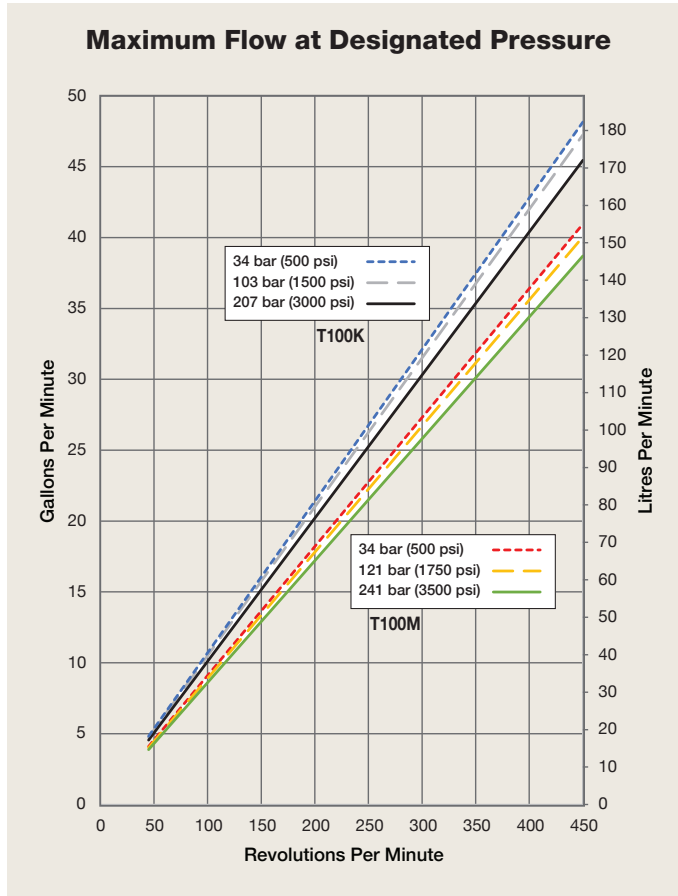

T100 Series pumps feature the Hydra-Cell seal-less design, eliminating clean-up costs from leaking seals or packing and protecting operators from dangerous fluids such as those containing hydrogen sulfide.

Due to the Wanner Engineering Continuous Improvement Program, specifications and other data are subject to change.

# T100 Pro Medium Pressure | Specifications

## Flow Capacities

Model	Pressure bar (psi)	rpm	US gpm	l/min	BPD
T100K	207 (3000)	450	45	170	1543
T100M	241 (3500)	450	38	144	1302

## Delivery

	Pressure bar (psi)	gal/rev	litres/rev
T100K	34 (500)	0.107	0.406
	103 (1500)	0.105	0.397
	207 (3000)	0.101	0.384
T100M	34 (500)	0.091	0.345
	121 (1750)	0.089	0.338
	241 (3500)	0.086	0.327

## rpm

Maximum:	450
Minimum:	45

Consult factory for speeds less than 45 rpm.

## Maximum Discharge Pressure

Metallic Heads:	T100K 207 bar (3000 psi)
	T100M 241 bar (3500 psi)

## Maximum Inlet Pressure 34 bar (500 psi)

## Operating Temperature

Maximum Liquid Temperature:	82.2°C (180°F)
Consult factory for use with higher liquid temperatures	
Diaphragm Material Minimum Service Temperature (Ambient & Liquid):	
Aflas	30°C
EPDM	-20°C
FKM	5°C
Buna-N (HBNR)	-5°C

Consult factory for temperatures outside of these ranges

## Maximum Solids Size 800 microns

## Input Shaft Left or Right Side

## Inlet Ports 3-½ inch Class 300 RF ANSI Flange or 2-½ inch NPT

## Discharge Ports 1-½ inch Class 2500 RTJ ANSI Flange or 1-½ inch NPT

## Plunger Stroke Length 88.9 mm (3-½ inch)

## Shaft Diameter 76.2 mm (3 inch)

## Shaft Rotation Uni-directional (See rotation arrow.)

## Calculating Required Horsepower (kW)\*

$$\frac{\text{US gpm} \times \text{psi}}{1,460} = \text{electric motor hp}^*$$

$$\frac{\text{lpm} \times \text{bar}}{511} = \text{electric motor kW}^*$$

\* hp (kW) is required application power.

## Attention!

When sizing motors with variable speed drives (VFD): It is very important to select a motor and a VFD rated for constant torque inverter duty service and that the motor is rated to meet the torque requirements of the pump throughout desired speed range.

## Oil Capacity 19.4 litres (20.5 US quarts)

See page 5 for oil selection and specification.

## Weight


Metallic Heads:	499 kg (1100 lbs.)
-----------------	--------------------

## Fluid End Materials

Manifold:	Nickel Aluminum Bronze (NAB) Duplex Alloy 2205 Stainless Steel 316L Stainless Steel CF3M Hastelloy CX2MW
Diaphragm/Elastomers:	FKM Buna-N Aflas EPDM
Diaphragm Follower Screw:	316 Stainless Steel Duplex Alloy 2205 Stainless Steel Hastelloy C
Valve Spring Retainer:	PVDF Polypropylene 316 SST Hastelloy C
Check Valve Spring:	Elgiloy Hastelloy C
Valve Disc/Seat:	Tungsten Carbide 17-4 Stainless Steel Nitronic 50 Hastelloy C
Plug-Outlet Valve Port:	316 Stainless Steel Duplex Alloy 2205 Stainless Steel Hastelloy C
Inlet/Outlet Valve Retainer:	316 Stainless Steel Duplex Alloy 2205 Stainless Steel Hastelloy C

## Power End Materials


Crankshaft:	Forged Q&T Alloy Steel
Connecting Rods:	Ductile Iron
Crossheads:	12L14 Steel
Crankcase:	Ductile Iron
Bearings:	Spherical Roller/Journal (main) Steel Backed Babbit (crankpin) Bronze (wristpin)

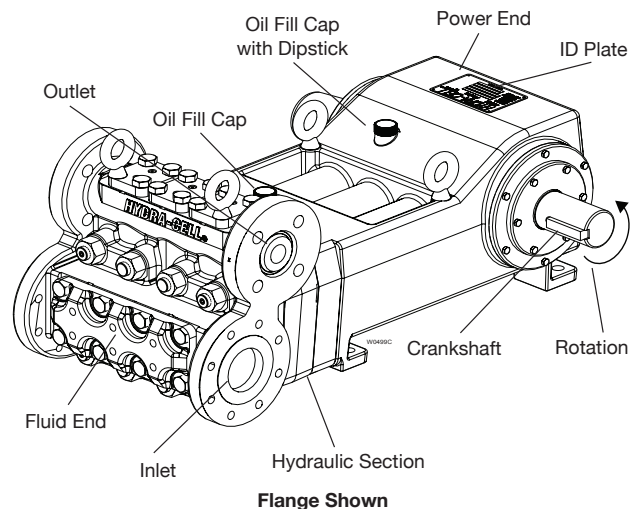


Due to the Wanner Engineering Continuous Improvement Program, specifications and other data are subject to change.

# T100 Pro Medium Pressure | Representative Drawings

## Threaded Version inches (mm)

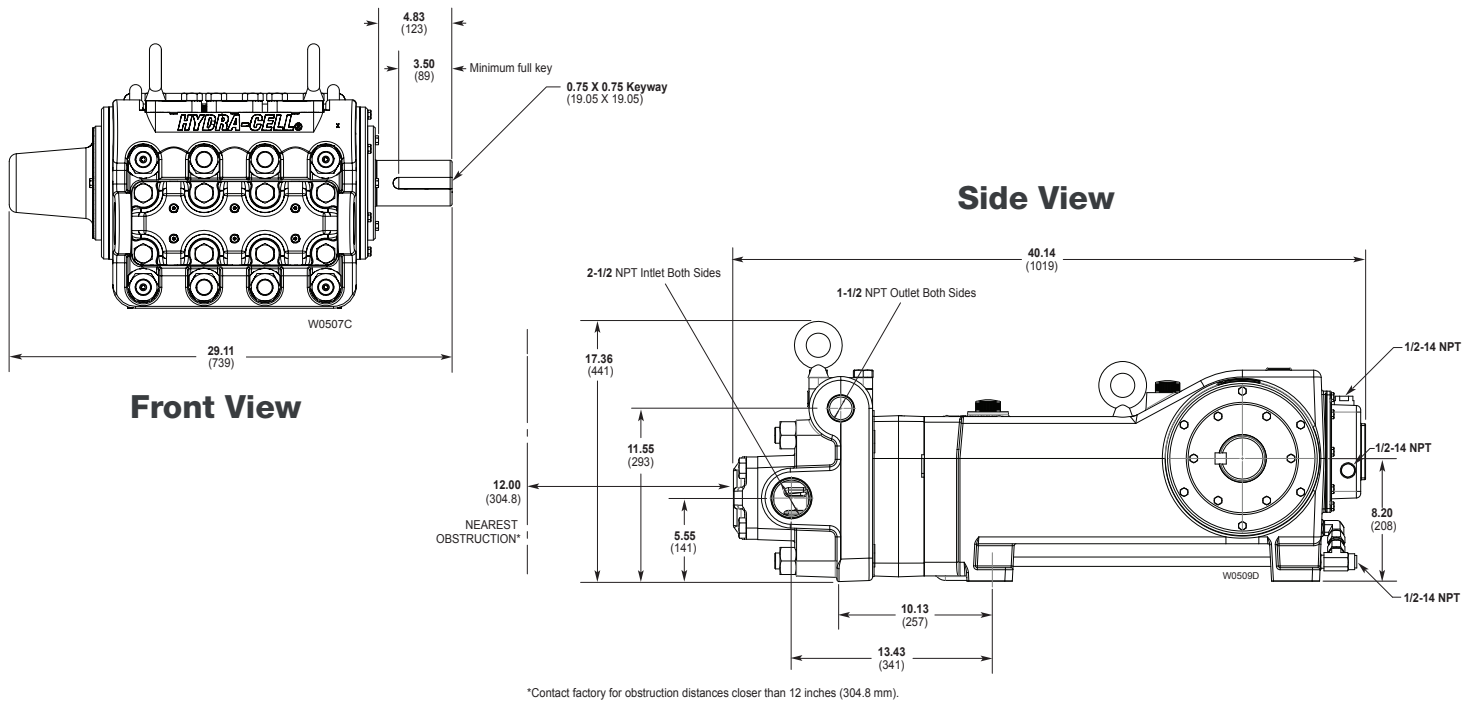

## Flanged Version inches (mm)

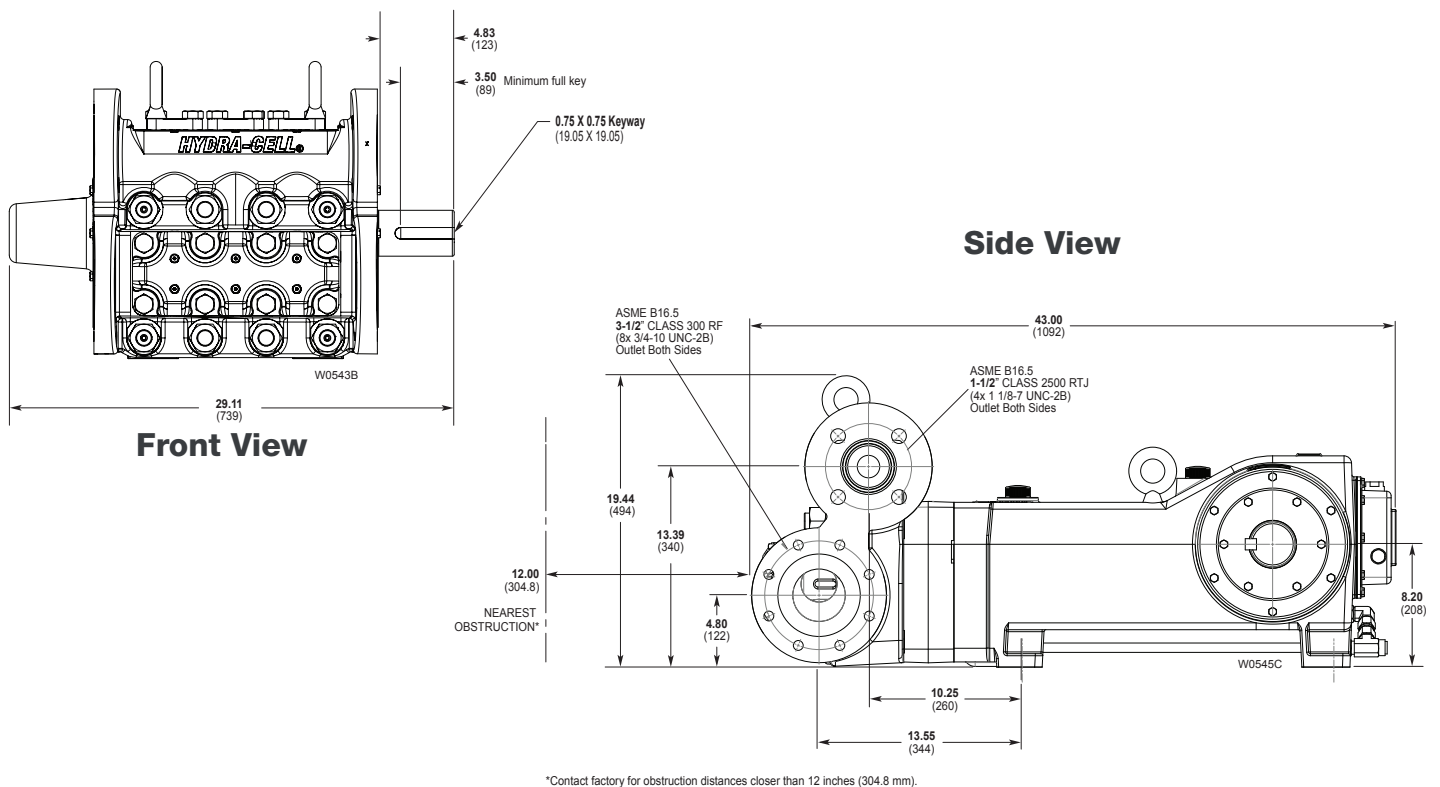

Note: Dimensions are for reference only. Contact Wanner International for certified drawings.

# T100 Pro Medium Pressure | How to Order

## Ordering Information

A complete T100 Series Medium Pressure Model Number contains 14 digits including 10 customer-specified design and materials options, for example: T100KADGDDEPAO.

1	2	3	4	5	6	7	8	9	10	11	12	13	14
T	1	0	0										

## T100 Medium Pressure

Digit	Order Code	Description
<b>1-4</b>	<b>T100</b>	<b>Pump Configuration</b> Shaft-driven API 674 - Contact Wanner International
<b>5</b>	<b>K</b>	<b>Performance</b> Max. 170 l/min (45 US gpm) 1543 BPD @ 207 bar (3000 psi)
	<b>M</b>	Max. 144 l/min (38 US gpm) 1302 BPD @ 241 bar (3500 psi)
<b>6</b>	<b>A</b>	<b>Pump Head Version</b> NPT Ports (for NAB only)
	<b>R</b>	ANSI Flanged Ports (RF on Inlet / RTJ on Discharge)
<b>7</b>	<b>D</b>	<b>Pump Head Material</b> Nickel Aluminium Bronze (NAB)
	<b>G</b>	Duplex Alloy 2205 Stainless Steel
	<b>S</b>	316L Stainless Steel CF3M
	<b>T</b>	Hastelloy CX2M
<b>8</b>	<b>A</b>	<b>Diaphragm &amp; O-ring Material</b> Aflas
	<b>E</b>	EPDM (requires EPDM-compatible oil - digit 13 code D)
	<b>G</b>	FKM
	<b>T</b>	Buna-N (HBNR)
<b>9</b>	<b>D</b>	<b>Valve Seat Material</b> Tungsten Carbide*
	<b>H</b>	17-4 Stainless Steel
	<b>N</b>	Nitronic 50
	<b>T</b>	Hastelloy C
<b>10</b>	<b>D</b>	<b>Valve Material</b> Tungsten Carbide*
	<b>F</b>	17-4 Stainless Steel
	<b>N</b>	Nitronic 50
	<b>T</b>	Hastelloy C
<b>11</b>	<b>D</b>	<b>Valve Springs</b> Elgiloy for Tungsten Carbide valves*
	<b>E</b>	Elgiloy
	<b>H</b>	Hastelloy C for Tungsten Carbide valves*
	<b>T</b>	Hastelloy C

Digit	Order Code	Description
<b>12</b>	<b>M</b>	<b>Valve Spring Retainers*</b> PVDF
	<b>P</b>	Polypropylene
	<b>S</b>	316 SST
	<b>T</b>	Hastelloy C
<b>13</b>	<b>A</b>	<b>Hydra-Oil</b> 10W30 standard-duty oil
	<b>B</b>	40-wt. oil
	<b>D</b>	EPDM-compatible oil
	<b>H</b>	15W50 high-temp severe-duty synthetic oil
	<b>M</b>	Food-contact oil
<b>14</b>	<b>C</b>	<b>Oil Level Monitoring</b> Float Switch, normally closed (recommended)
	<b>O</b>	Float Switch, normally open
	<b>S</b>	Float switch, Class I, Div. 1, Groups A, B, C, D, normally closed
	<b>T</b>	Float switch, Class I, Div. 1, Groups A, B, C, D, normally open
	<b>W</b>	Float switch, ATEX/IECEx, 4-20 mA analog output (qualification required ***)
	<b>X</b>	Float switch, ATEX/IECEx, discrete output (qualification required**)

\* Tungsten Carbide valve seat and disc are a matched set and must be purchased together - and only available with non-metallic retainers.

\*\* ATEX instrument only, pump as standard.

\*\*\* ATEX-compliant pump and float switch.

**Note:** The Oil Level Monitor Cover is an assembly that replaces the previous back cover on T100 Series pumps. It contains a float switch assembly that can trigger an alarm or shutdown when pre-defined levels of high or low oil are reached. It may also be ordered without a float switch cover.



### ATEX Certification Kit Options

As a separate line on your order, please add the required ATEX Certification Kit Option.

– ATEX 2014/34/EU Certified, Category 2, Zone 1

– ATEX 2014/34/EU Certified, Category 3, Zone 2

- All options include Certificate, Oil Level Monitor or Sight Glass, Earth Stud & Secondary ATEX Label.
- Extra oil is required to fill the oil bowl during installation of ATEX pumps. This oil is not included and must be ordered separately.

## Partners in over 70 countries



Global Sales and Technical Support

### Americas

- Minneapolis, Minnesota USA
- Wichita Falls, Texas USA
- São Paulo, Brazil
- Buenos Aires, Argentina

### EMEA | Australia

- Hampshire, United Kingdom
- Cairo, Egypt
- Düsseldorf, Germany
- Lyon, France

### Asia | Pacific

- Kowloon, Hong Kong
- Shanghai, China
- Jakarta, Indonesia

### India

- Mumbai, India
- New Delhi
- Bangalore
- Gujarat

## Wanner worldwide

GLOBAL SALES & TECHNICAL SUPPORT

### WANNER ENGINEERING, INC.

WORLD HEADQUARTERS & MANUFACTURING

Minneapolis, Minnesota USA  
t: 612-332-5681  
e: sales@wannereng.com  
Hydra-Cell.com

### REGIONAL OFFICE

Wichita Falls, Texas USA  
t: 940-322-7111  
e: sales@wannereng.com

### LATIN AMERICAN OFFICE

São Paulo, Brazil  
t: +55 (11) 99582-1969  
e: mmagoni@wannereng.com  
Hydra-Cell-Pumps.com.br

### WANNER INTERNATIONAL, LTD.

UNITED KINGDOM

Church Crookham,  
Hampshire UK GU52 8BF  
t: +44 (0) 1252 816847  
e: support@wannerint.com  
Hydra-Cell.co.uk

### WANNER PUMPS, LTD.

Kowloon, HONG KONG

t: +852 3428 6534  
e: sales@wannerpumps.com  
WannerPumps.com

Shanghai, CHINA

t: +86-21-6876 3700  
e: sales@wannerpumps.com  
WannerPumps.com

### WANNER INDIA PVT. LTD.

Mumbai, INDIA

t: +91 (22) 22044766  
e: support@wannerindia.com  
WannerIndia.com

